


EXTERNAL COMPANY INSTRUCTION

LIFTING PLATFORM



PLATFORM CONTROL PANEL WITH TILT SWITCH

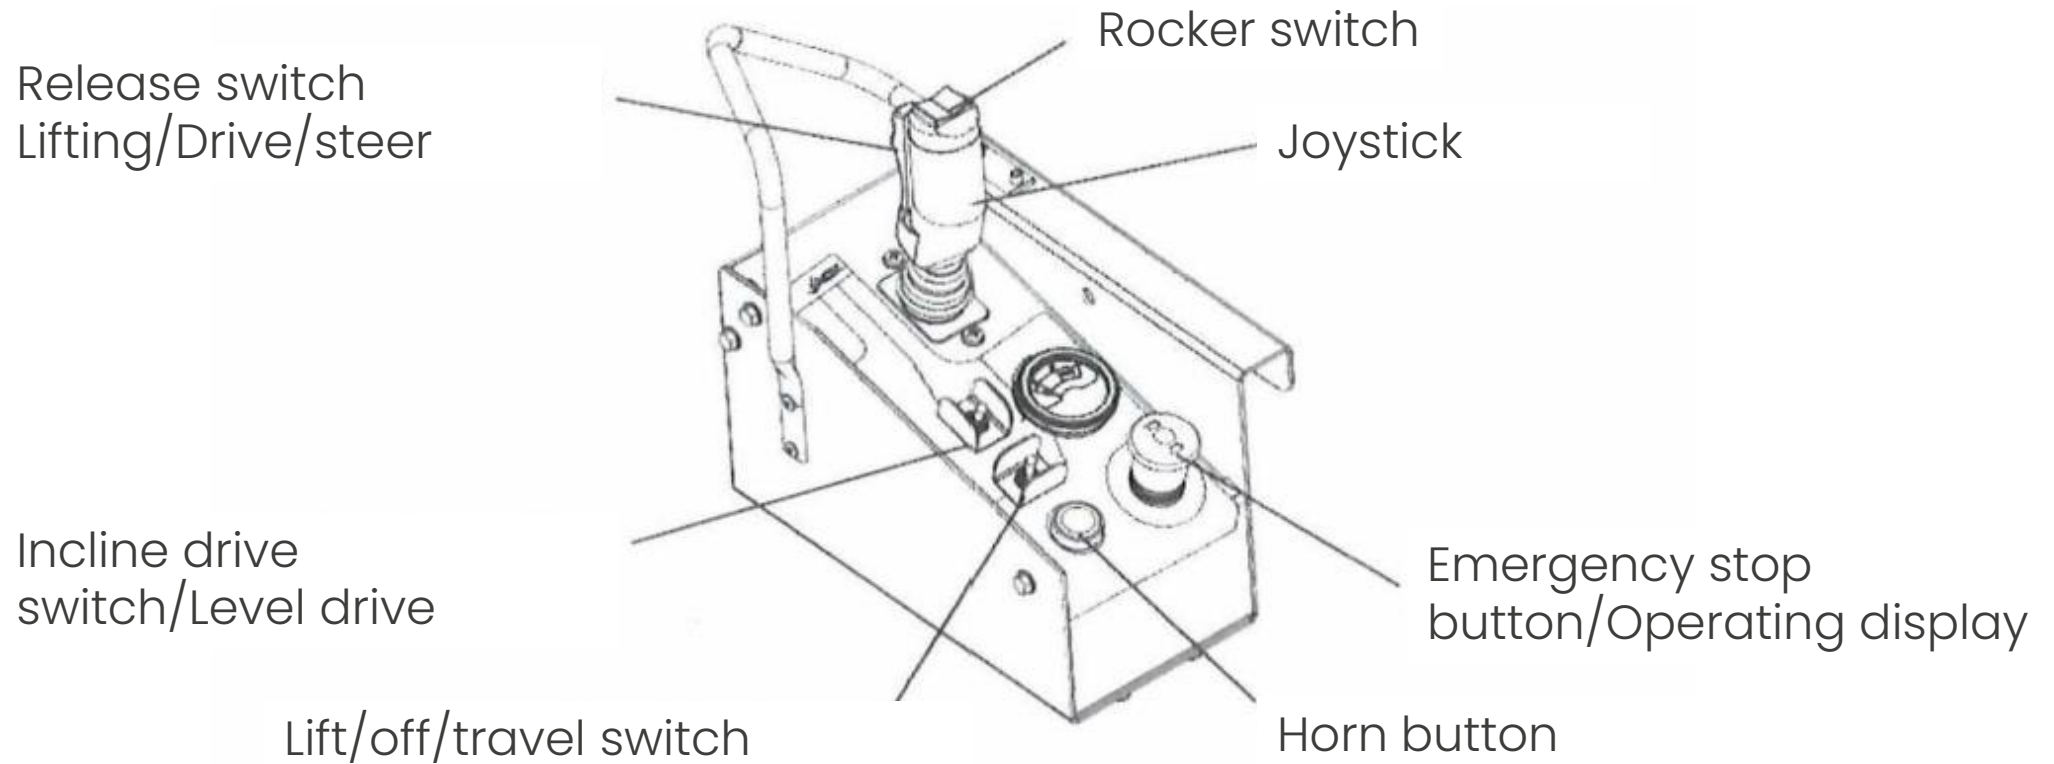



CHECK PLATFORM

→ Extend/Retract

WARNING:


When extending the platform, watch out for obstacles at overhead height or other potential hazards in the vicinity of the working platform.

1. Set the lift/stop/run switch to the  lift position.
2. Press  and hold the release switch.
3. Press the control stick and extend the platform to a height of approx. 0.5 cm.
✓ **Result:** The platform should extend.
4. Pull the control stick and retract the platform completely.
✓ **Result:** The platform should retract.

CHECK LOWERING WARNING

1. Extend the platform to a height of about 3 to 4 metres, then try to retract the platform completely.
 - ✓ **Result:** The lowering process of the platform should stop at a height of 2.5 metres and an alarm should sound.
2. Release the control stick.

CHECK SIGNAL HORN

1. Press  the horn button..
 - ✓ **Result:** The horn should sound.

INFORMATION

- Drive only in the lowered position
- Use only inside the building. If used outside the building, the client must be informed
- For activities requiring PPE against falls from a height and other PPE, this can be provided by the client
- A second person must be used as a guide when working in areas where visibility is difficult
- A safe distance must always be maintained from electrical cables
- The operating instructions can be found on the following page (please read)



REQUEST FOR CONFIRMATION

By signing this document, the contractor/operator confirms that he/she has understood all points of the brief instruction, that he/she is physically fit to operate an aerial work platform and that he/she has received training in accordance with DGUV 308-008.